


250 BDV LEVER INSTALLATION



1

Place the lever's square hole over the shaft as shown.



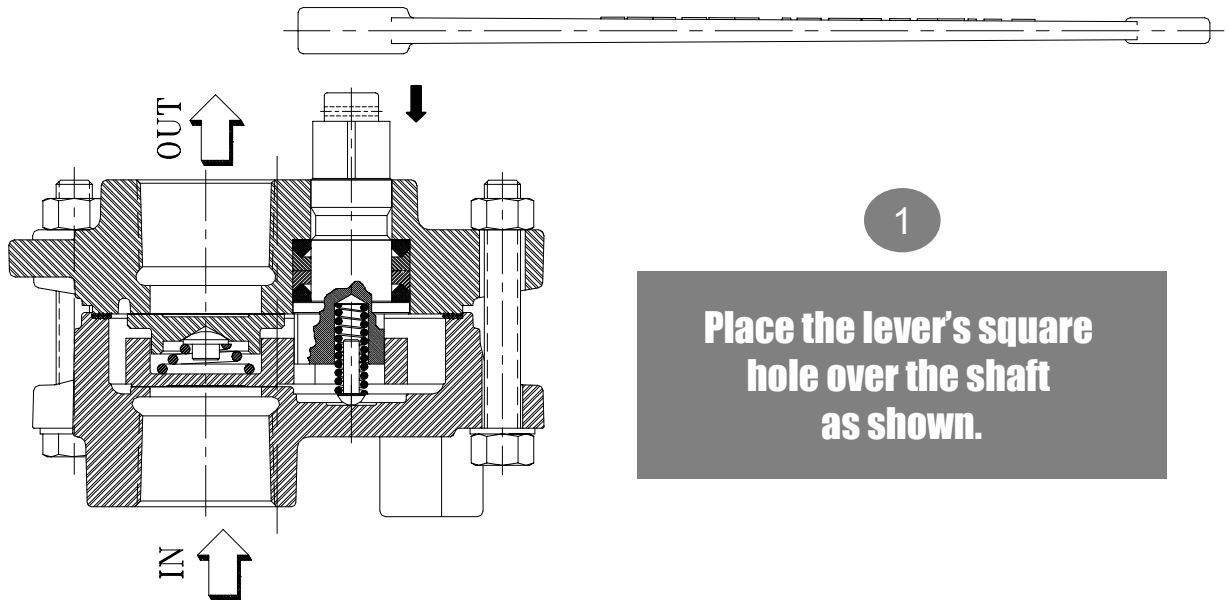


2

Secure lever by passing the safety pin through the hole in the shaft, as shown.


*** Safety pin**

*** Spread pin wires**

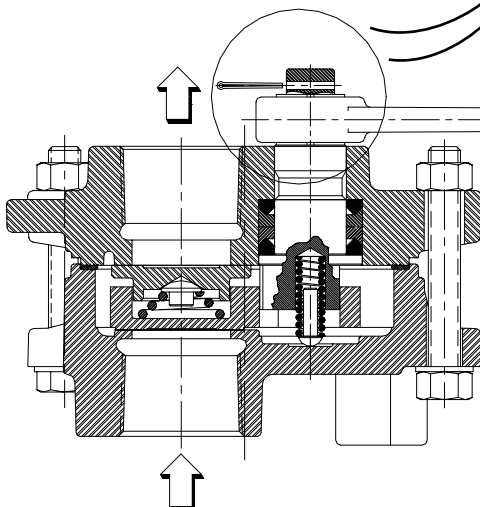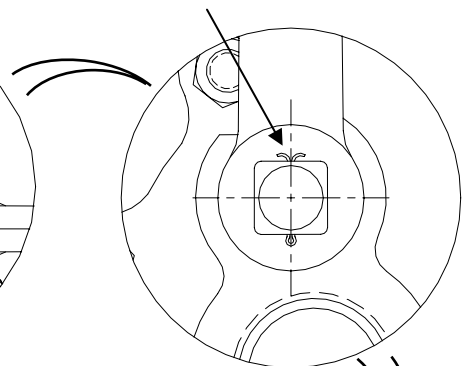


3

**Thread set,
screw into
lever.**

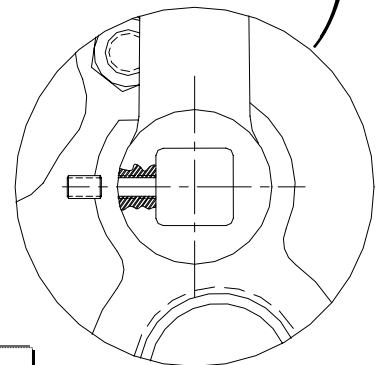

DATA SHEET

BOILER BLOWDOWN VALVES

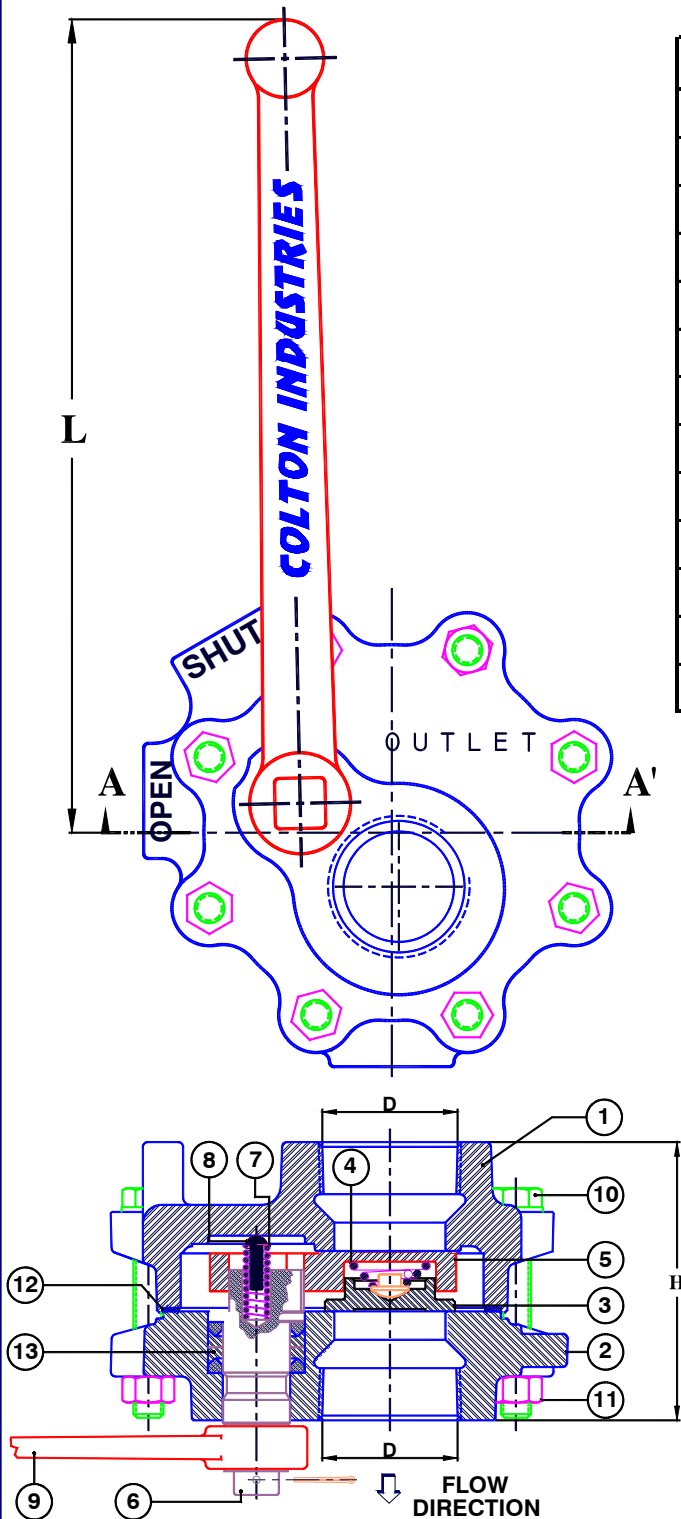

ITEM	NAME	MATERIAL
1	Inlet Body	ASTM A 126
2	Outlet body	ASTM A 126
3	Disc	AISI 420
4	Disc spring	AISI 302
5	Disc holder	ASTM A 126
6	Stem	Brass
7	Stem spring	AISI 302
8	Stem pivot	AISI 420
9	Handle	Ductile iron
10	Body bolts	Steel grade 2
11	Body nuts	Steel
12	Body gasket	Graphite
13	Stem packing	Graphite

DIMENSIONS AND WEIGHTS

MODEL	D (NPT)	H (Inches)	L (Inches)	Weight (Pounds)
1 1/4" 250 BDV	1 1/4"	3.6	10.6	13
1 1/2" 250 BDV	1 1/2"	4.5	11	23
2" 250 VDB	2"	4.6	12	29



BOILER BLOWDOWN VALVE
1 1/4", 1 1/2" & 2" 250 Pounds


DWG N°

250 BDV

REV. 0

DATE: JAN - 2.005

250 BDV PACKING REPLACEMENT

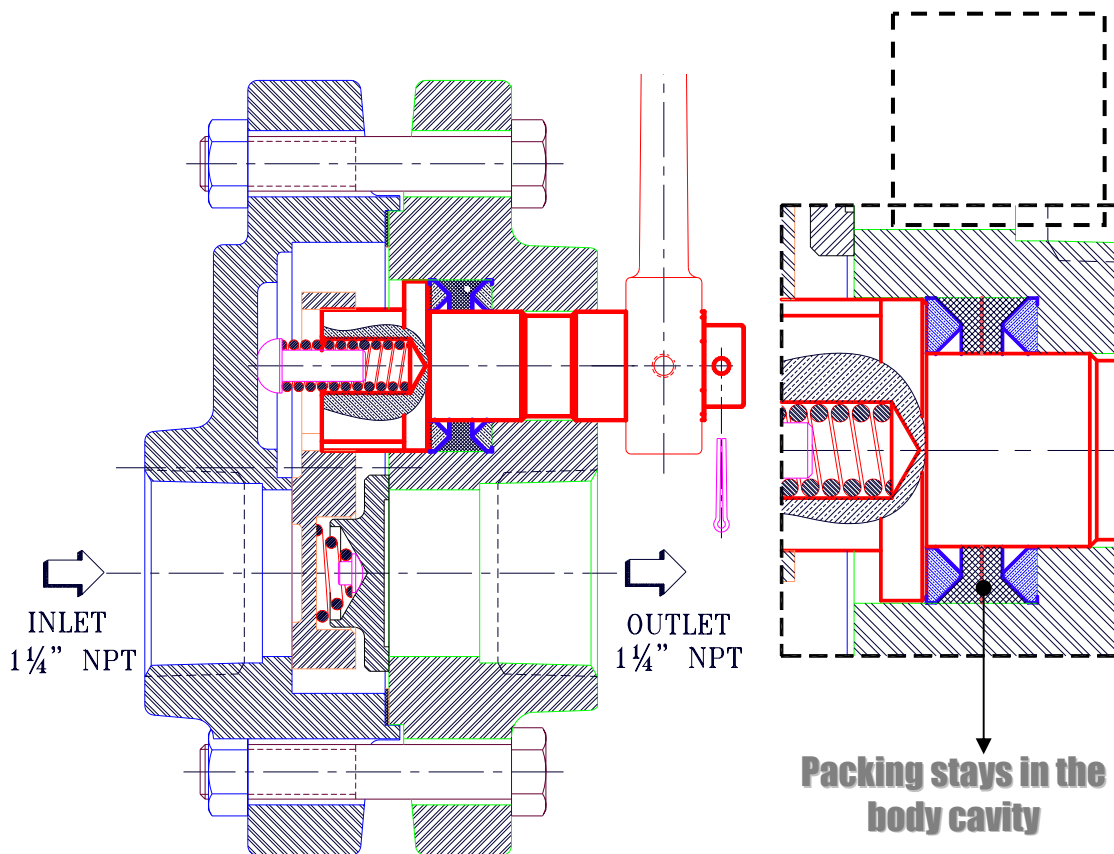

**Compression Ring
(Bronze)**

SUB - ASSEMBLY

